




Showpiece Pro Stand - Install Guide

Hardware Parts List

Item Number	Part Number	Item Description	Total Item Quantity
1	752392301	Lower Tube	2
2	752392309	Center Bracket	1
3	752392302	Lower C Tube	1
4	752392303	Lower Arc Tube	2
5	752392304L/R	Lower Plate (LH/RH)	2
6	752392307L/R	Lower Joining Bracket (LH/RH)	2
7	752392321	Upper Tube	2
8	NA	VESA Mounting Kit	1
8a	752392305	-VESA Mounting Bracket	1
8b	752392406	-LCD Mounting Bracket	2
9	780000325	-Screw, 8-32x1-1/4 (LCD Bracket)	2
10	775000120	Carriage Bolt 1/4-20 x 2	8
11	775000121	Carriage Bolt 1/4-20 x 2 ½	6
12	775000122	Carriage Bolt 1/4-20 x 4 ½	6
13	775000320	Carriage Bolt 1/4-20 x 30 mm	2
14	NA	Carriage Nut	20
15	NA	Washer	20
16	795000211	2" Plug, Square Ribbed (Installed)	2
17	795000261	Leveling Feet (Installed)	2

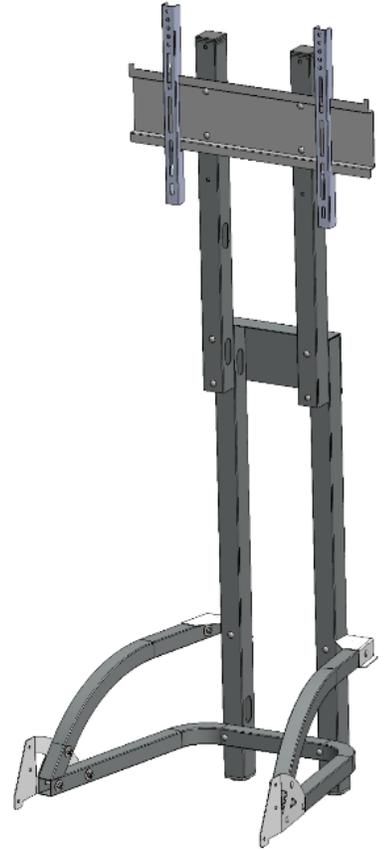



Showpiece Pro Stand - Install Guide

Hardware Images



Bolt



Washer



Nut



Leveling Mount



Lower Tube
(4 Bolt Holes)



Center
Bracket




Upper Tube
(6 Bolt Holes)




Lower C Tube



Arc Tube

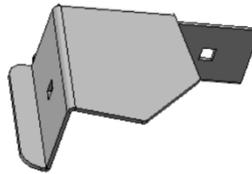

Lower Joining Bracket

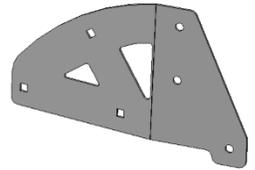

Lower Plate




Tools: You will need a 7/16" deep socket and nut driver, 4mm hex Allen key and a Phillips screwdriver.



Showpiece Pro Stand - Install Guide

Installed Hardware

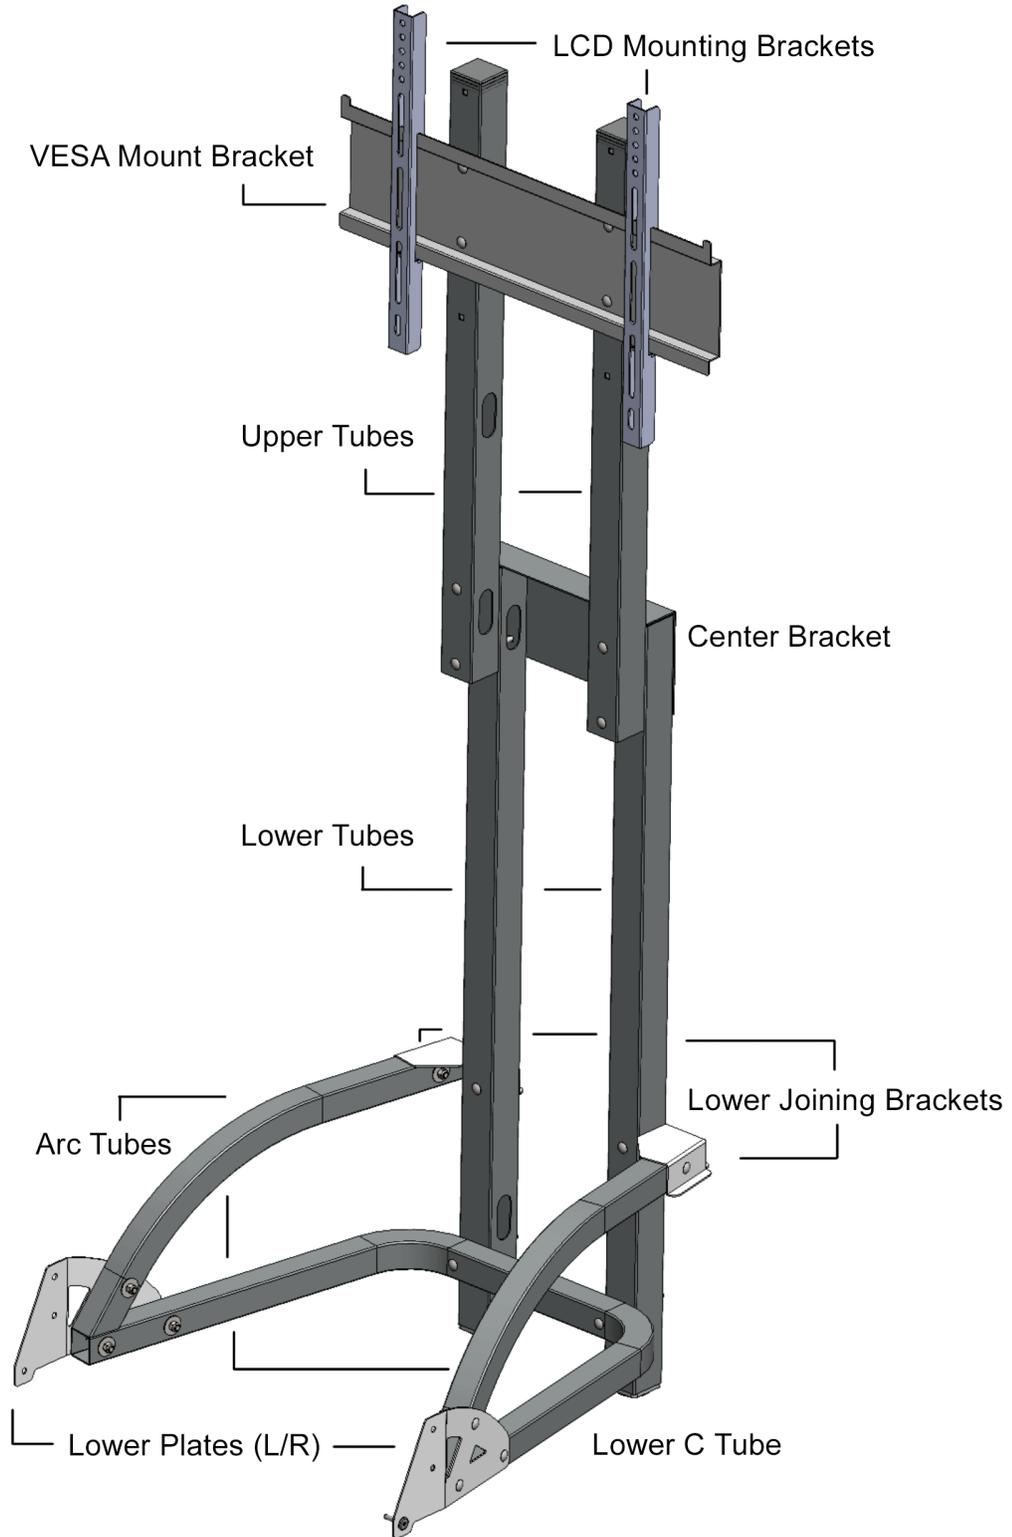




Showpiece Pro Stand - Install Guide

1

Attach Center Bracket to Upper/Lower Tubes

- Set **Center Bracket** in a clear space on the floor with the short hood of the bracket facing upward.
- Set two **Lower Tubes** (four bolt holes) inside the Center Bracket so they are snug against the hood. The mouse holes (oval cable holes should face inward). Set two **Upper Tubes** on top of the **Lower Tubes**.
- Align the Upper and Lower Tubes so the Bolt Holes face upward.
- Drop four 1/4-20 x 4 1/2" **Carriage Bolts** through the Bolt Holes and rotate to the side.
- Attach four **Washers** and four **Nuts** to each Carriage Bolt and tighten with 7/16" Deep Socket and nut driver.

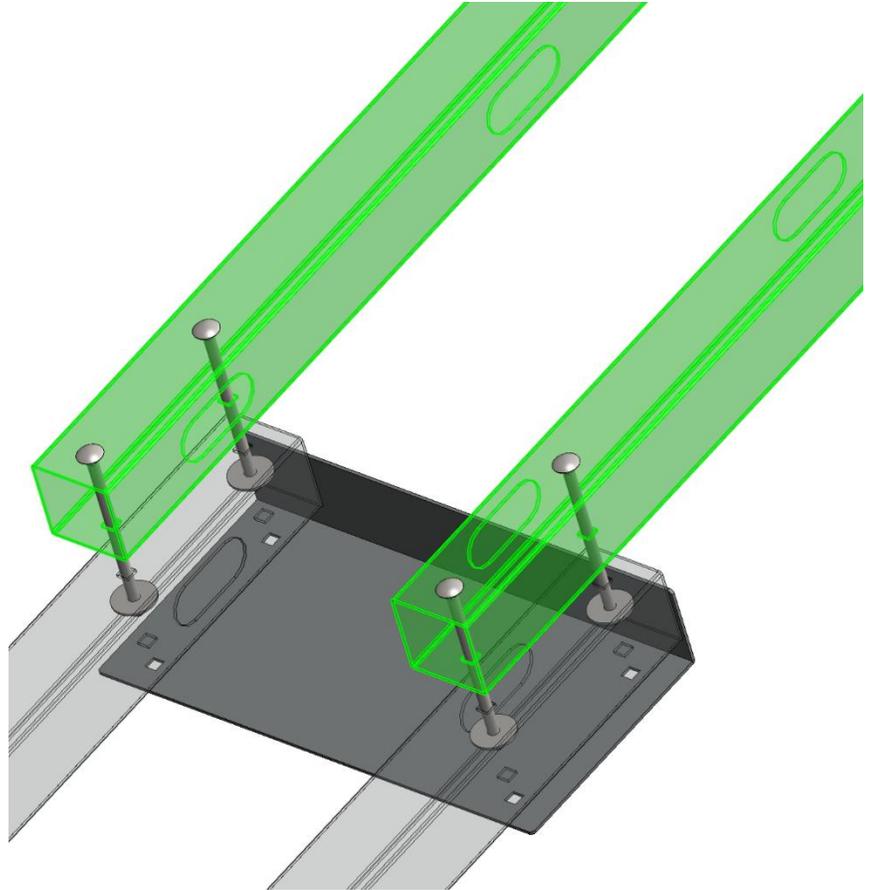




Showpiece Pro Stand - Install Guide

2 Attach Lower C Tube to Lower Tubes

- Use two 1/4-20 x 4 1/2" **Carriage Bolts**, two Washers and two Nuts to attach **Lower C Tube** to **Lower Tubes**. Tighten with 7/16" Deep Socket and nut driver.

Note: Make sure the oval cutout on the Lower C Tube is on the right side when facing the open C.


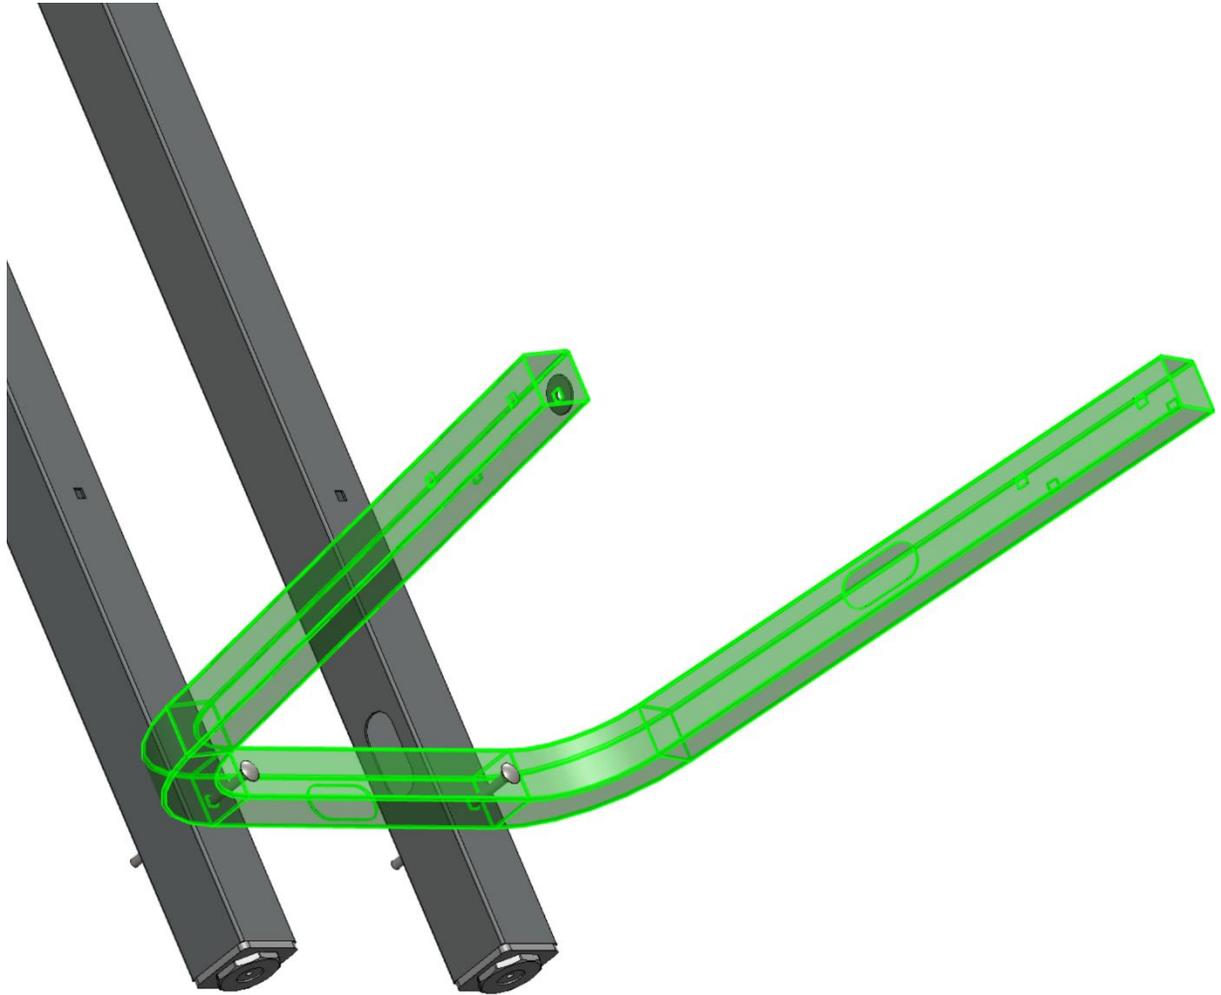




Showpiece Pro Stand - Install Guide

3 Attach Lower Joining Brackets

- Use one 1/4-20 x 2" **Carriage Bolt** to attach **Lower Joining Bracket** (L/R) to each **Arc Tube**. Then use one 1/4-20 2 1/2" **Carriage Bolt** to attach each **Joining Bracket** to the **Lower Tubes** so they form a right angle. Tighten with nut driver. **See Inset 1.**

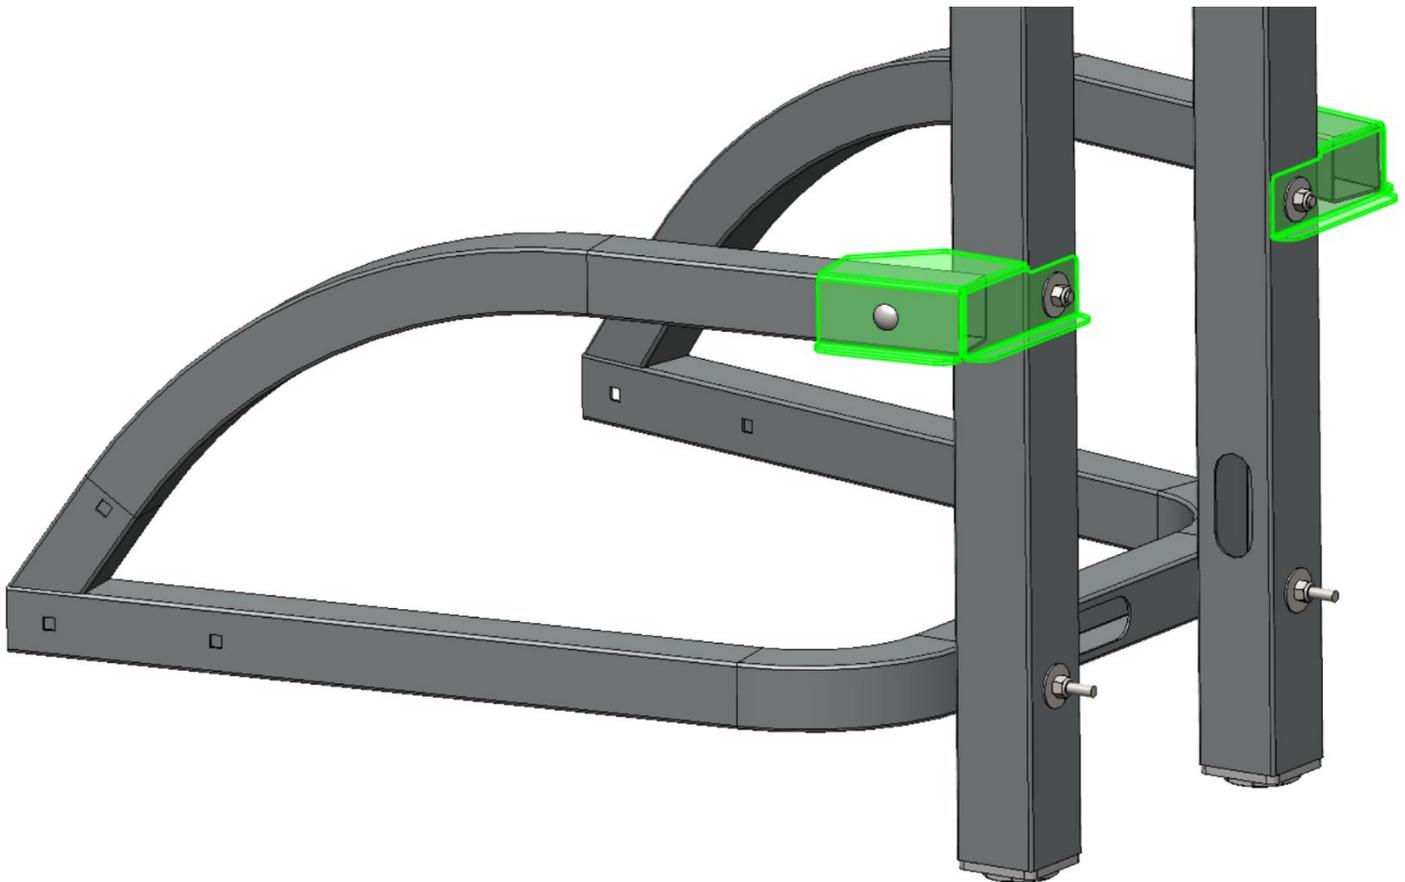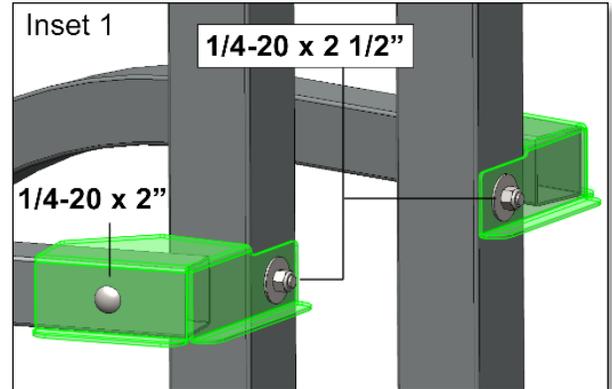





Showpiece Pro Stand - Install Guide

4

Attach Lower Plates

- Connect **Arc Tubes** to **Lower C Tube** with a **Lower Plate (L/R)** on each side. **See Inset 2.**
- Use three **1/4-20 x 2" Carriage Bolts, Washers and Nuts** (careful to have Washer and Nuts inside the frame) to attach a Lower Plate to the Arc Tube and Lower C Tube on each side. Tighten with nut driver.

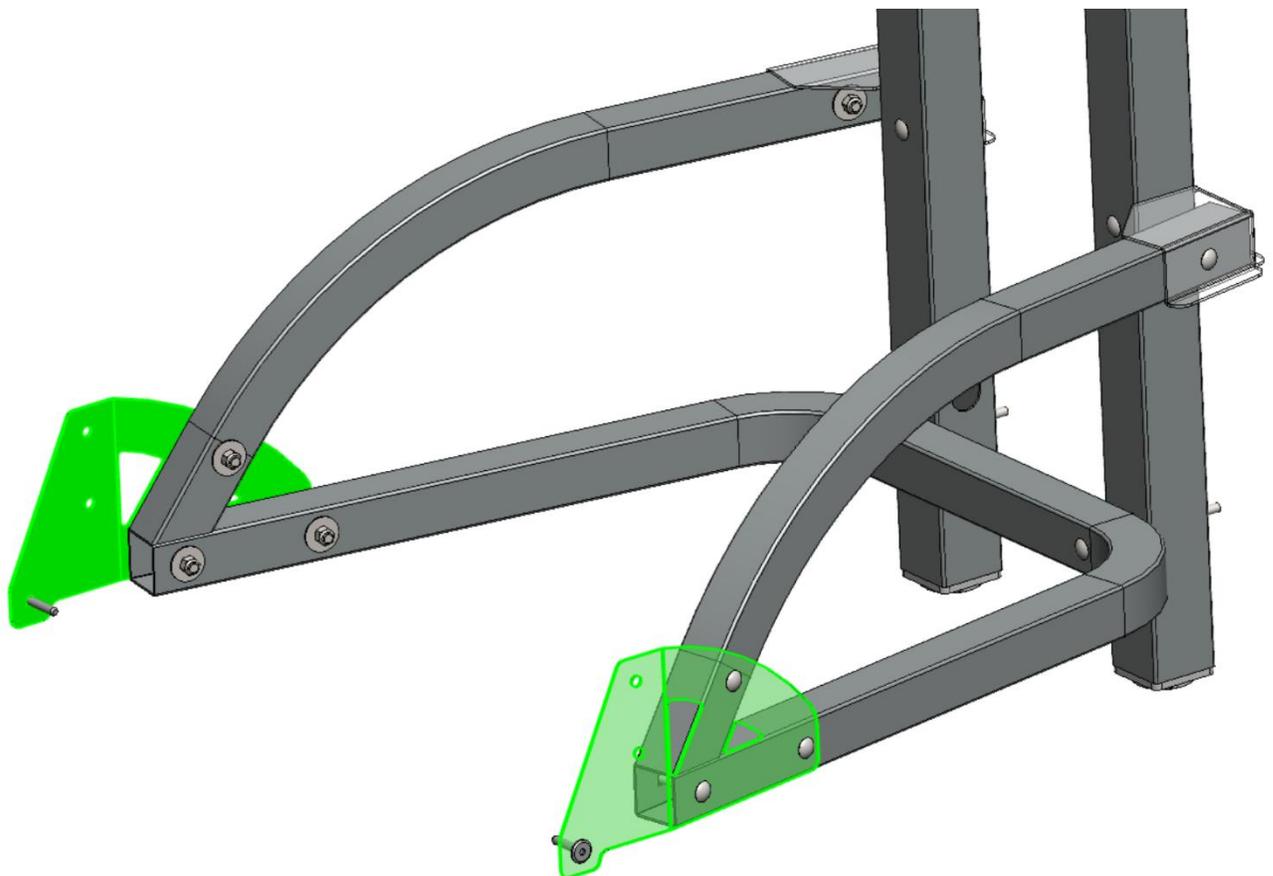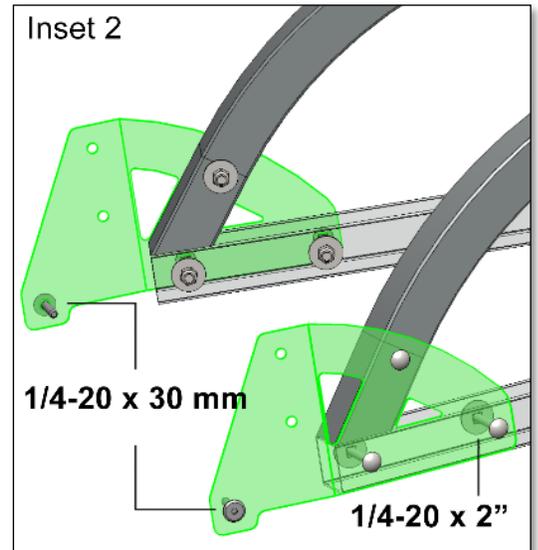




Showpiece Pro Stand - Install Guide

5 Attach Square Plugs and Position Stand

- Attach Square Plugs to tops of Upper Tubes (if not already attached).
- Place stand near electrical outlet. Adjust Leveling Mounts as necessary.
- Move cabinet into place in the middle of Lower C Tube.
- Use a 4 mm hex Allen key to remove a screw from each side of the cabinet.
- Secure two 1/4-20 x 30 mm bolts through Lower Plate on each side. **See Inset 2 on previous page.**
- Reattach the removed hex screws in the highest position on the Lower Plates to each side of the cabinet.

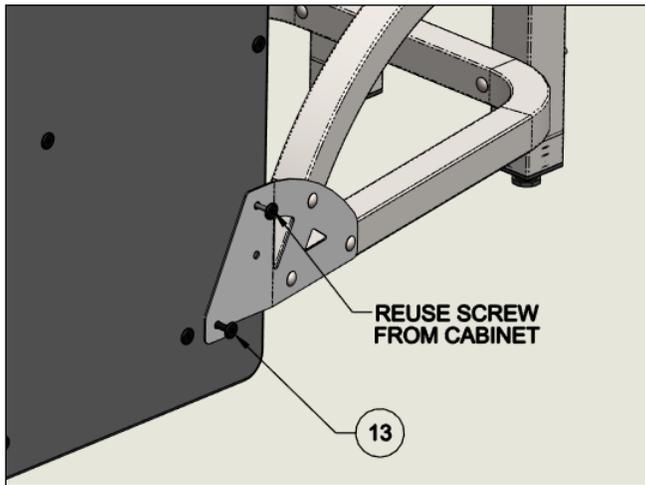




Showpiece Pro Stand - Install Guide

6

VESA Kit Assembly – Attach VESA Mount Bracket

- Use four 1/4-20 x 2 1/2" **Carriage Bolts, Washers** and **Nuts** to attach **VESA Mount Bracket** horizontally across front of **Upper Tubes**. There are four pre-cut holes at the top of the tubes—use the two middle holes on each tube. Tighten with nut driver.

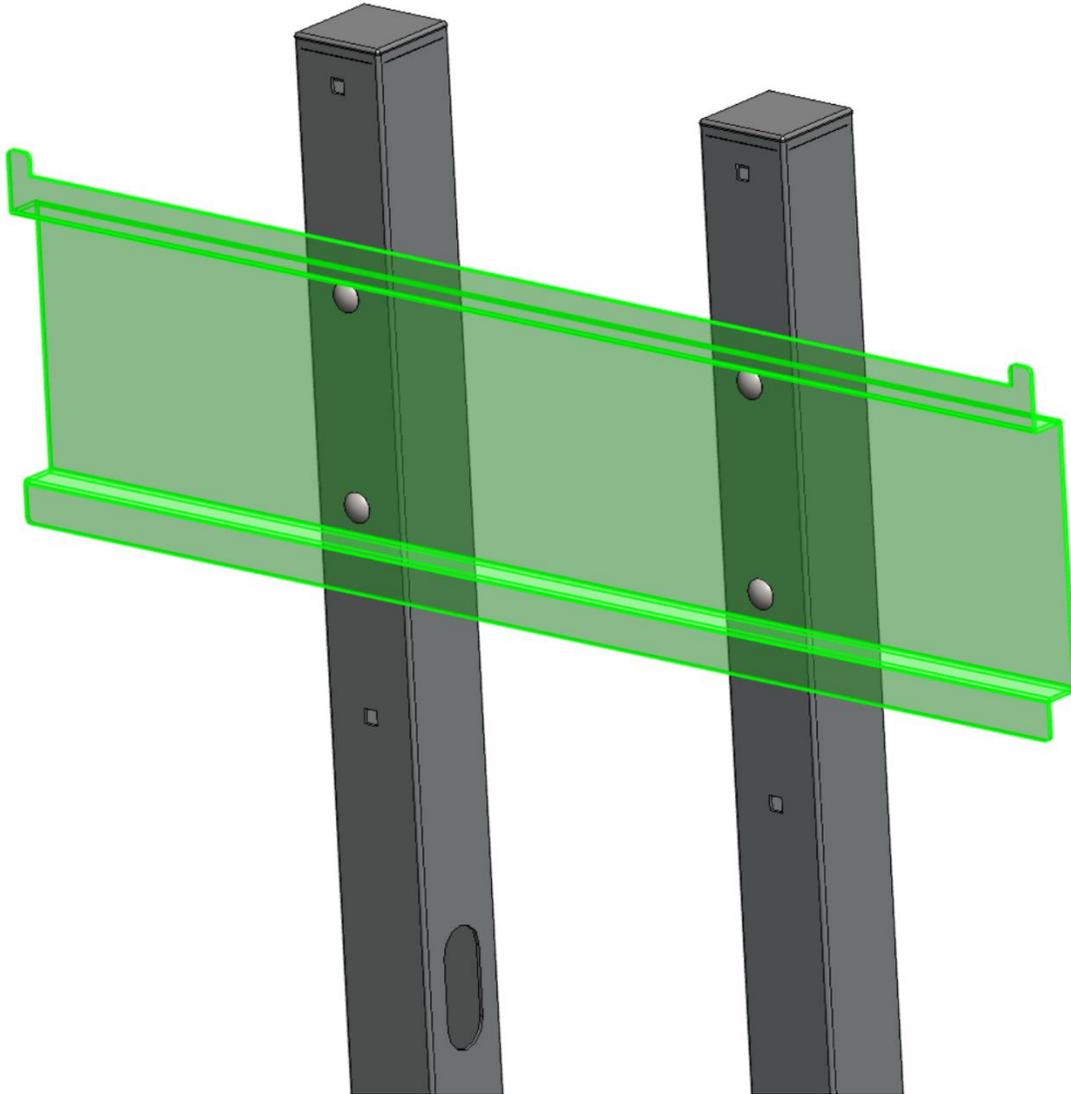





Showpiece Pro Stand - Install Guide

7 VESA Kit Assembly – Attach LCD Mounting Brackets to Monitor

- Use two Screws, 8-32x1-1/4 (LCD Bracket) to attach the LCD Mounting Brackets to a 4K monitor.

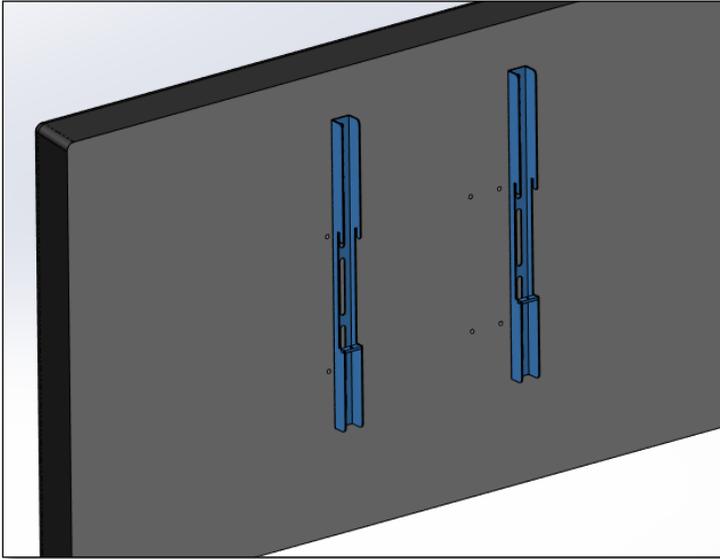

For PGA, make sure the monitor is horizontal.

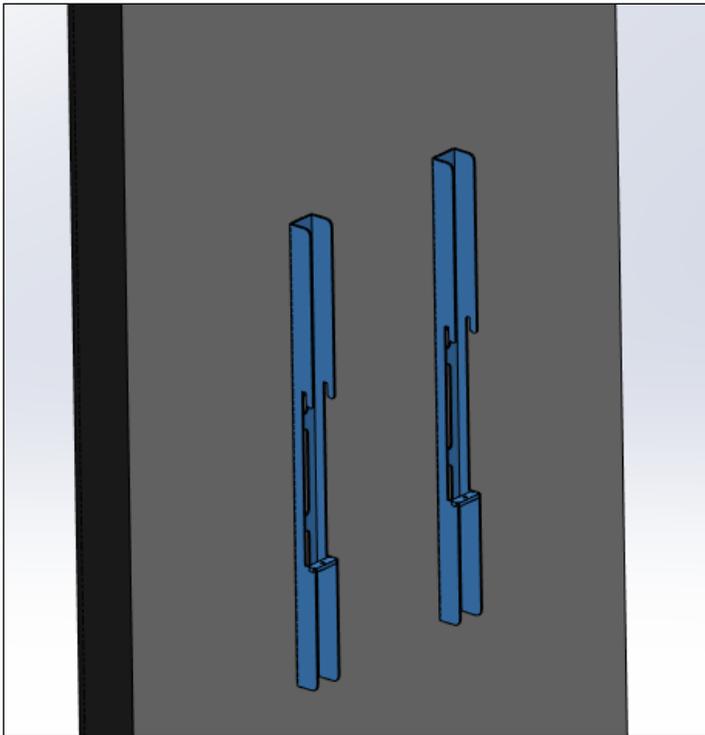

For Silver Strike League Night, make sure the monitor is vertical. See following page for special instructions on mounting Silver Strike monitors.



Showpiece Pro Stand - Install Guide

VESA Kit Assembly – Silver Strike League Night ONLY

The table below shows comparative height ranges of various monitor sizes in relation to the floor. The recommended monitor size is 55 inches.


Monitor Mounting Considerations

- The Marquee adds 14 inches to the overall height.
- The Showpiece Pro Stand monitor mount can be adjusted by a range of 12 inches between the highest and lowest mount configuration options.
- The middle mount position on the Stand is the recommended mounting configuration.
- The bottom of the screen should be about 36 to 42 inches from the floor.
- The examples listed are approximate measurements by plus or minus 2 inches.

Monitor Size Table

TV Size	High Mount	Middle Suggested	Low Mount
65"	99"	92"	88"
55"	94"	87"	82"
50"	92"	85"	81"
43"	89"	82"	78"

For diagrams of monitor sizes in relation to the Showpiece Pro Stand, see [Silver Strike League Night Monitor Sizes](#).

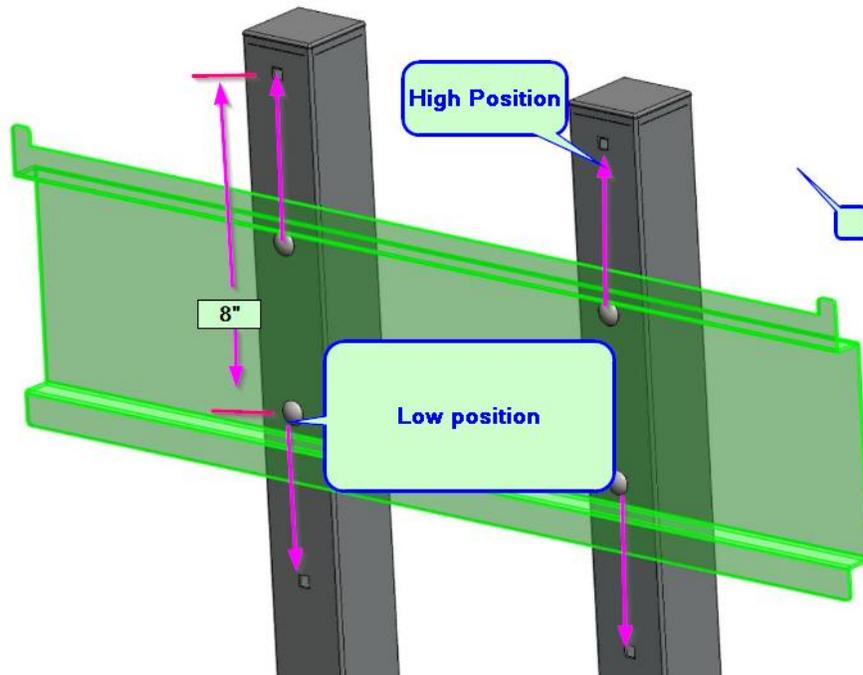






Showpiece Pro Stand - Install Guide

8 VESA Kit Assembly – Attach LCD Mounting Brackets to VESA Mount Bracket

Note: In the images below, the monitor is already attached but is not shown so it is possible to see VESA Mount Bracket orientation.

- Slide the LCD Mounting Brackets attached to the Monitor onto **VESA Mount Bracket**.
- Align as necessary.
- Use a Phillips screwdriver to tighten in place with one **Machine Screw** on each side.
- Drop cables from Monitor through mouse holes.

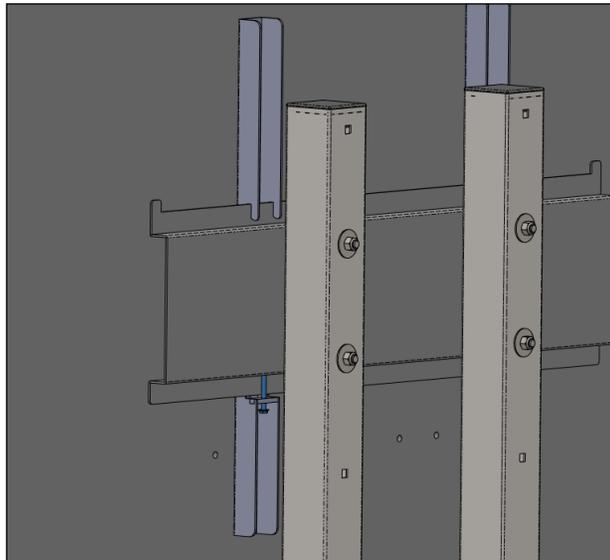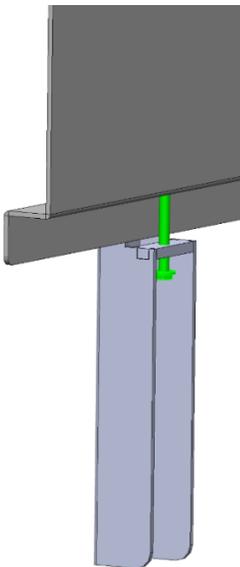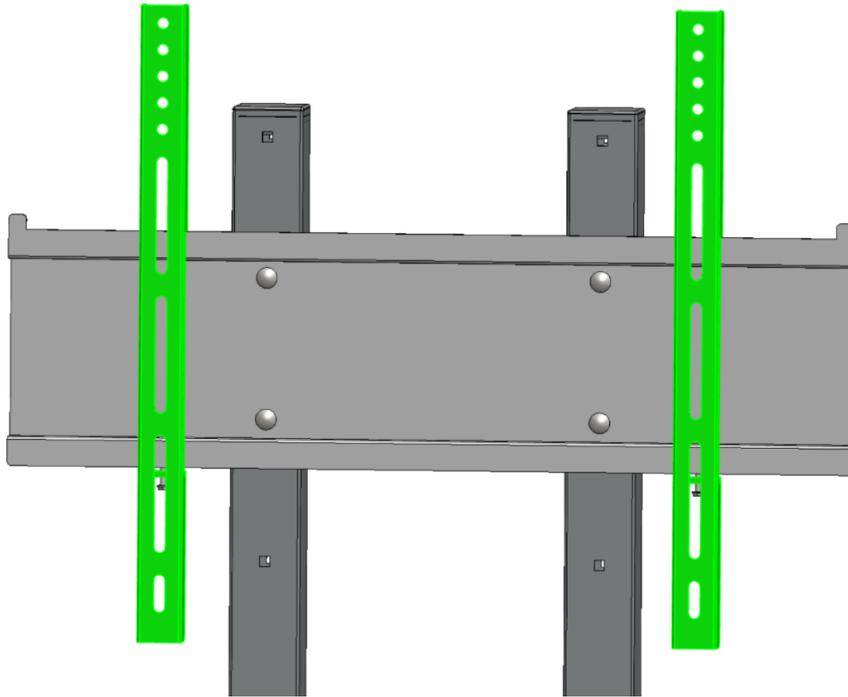



Showpiece Pro Stand - Install Guide

9

Missing or Damaged Parts

If you have missing or damaged parts or other questions regarding assembly, please visit Technical Support on our website:

<https://amusement.itsgames.com/tech-support>






Showpiece Pro Stand - Install Guide

Silver Strike League Night Monitor Sizes

For Silver Strike League Night ONLY


Stand with 55-inch Monitor (Recommended)

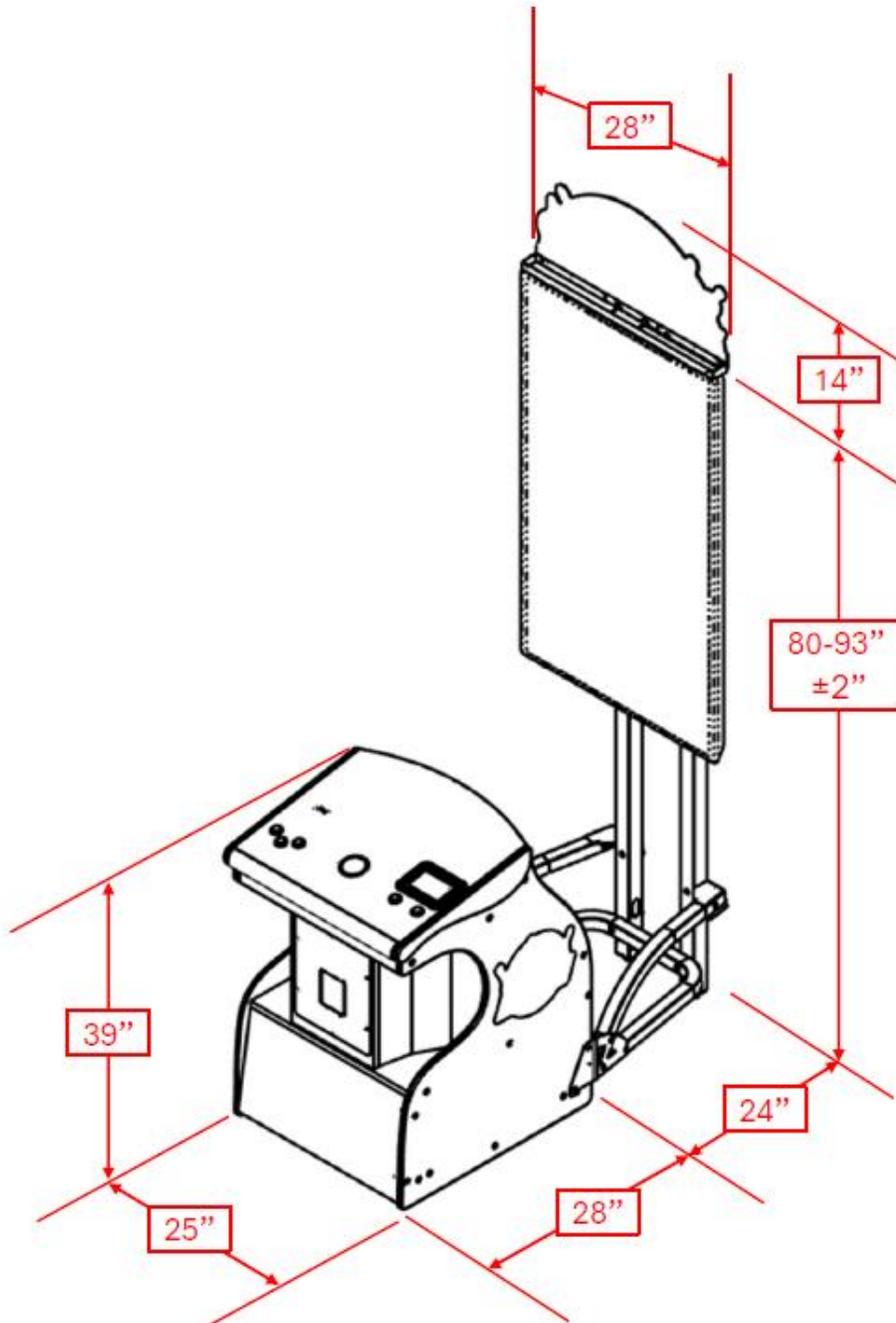



Showpiece Pro Stand - Install Guide


Stand with 65-inch Monitor

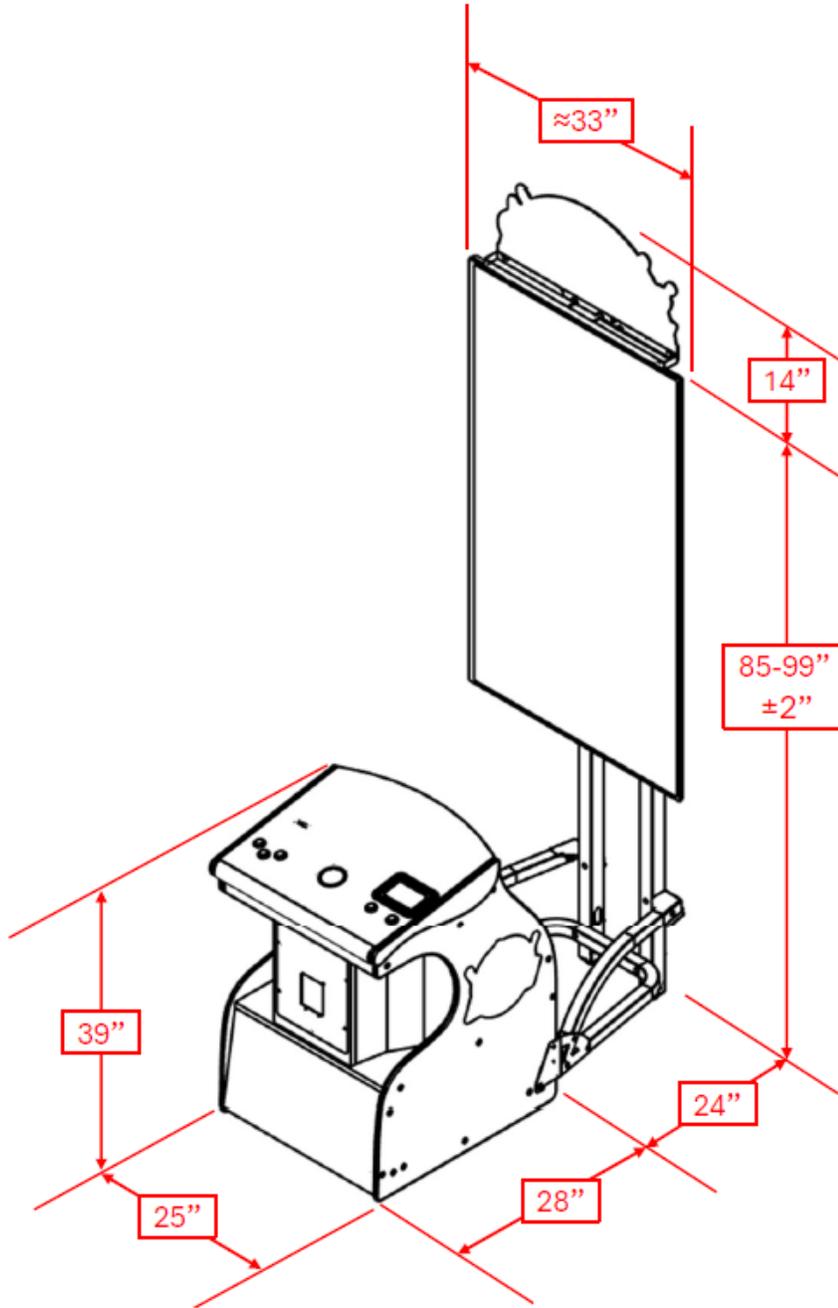



Showpiece Pro Stand - Install Guide


Stand with 50-inch Monitor

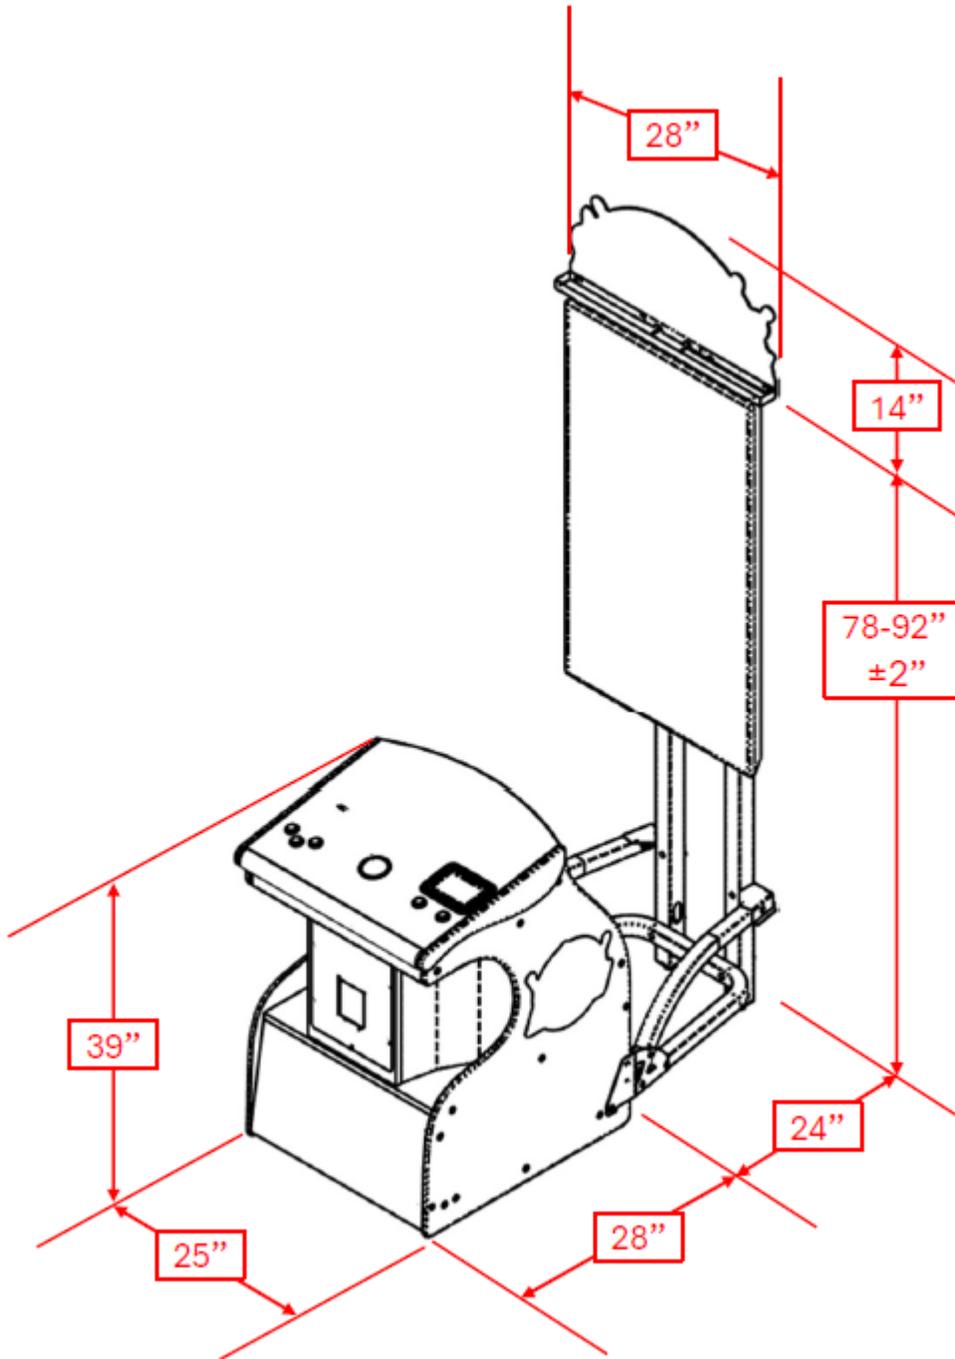



Showpiece Pro Stand - Install Guide

Stand with 43-inch Monitor

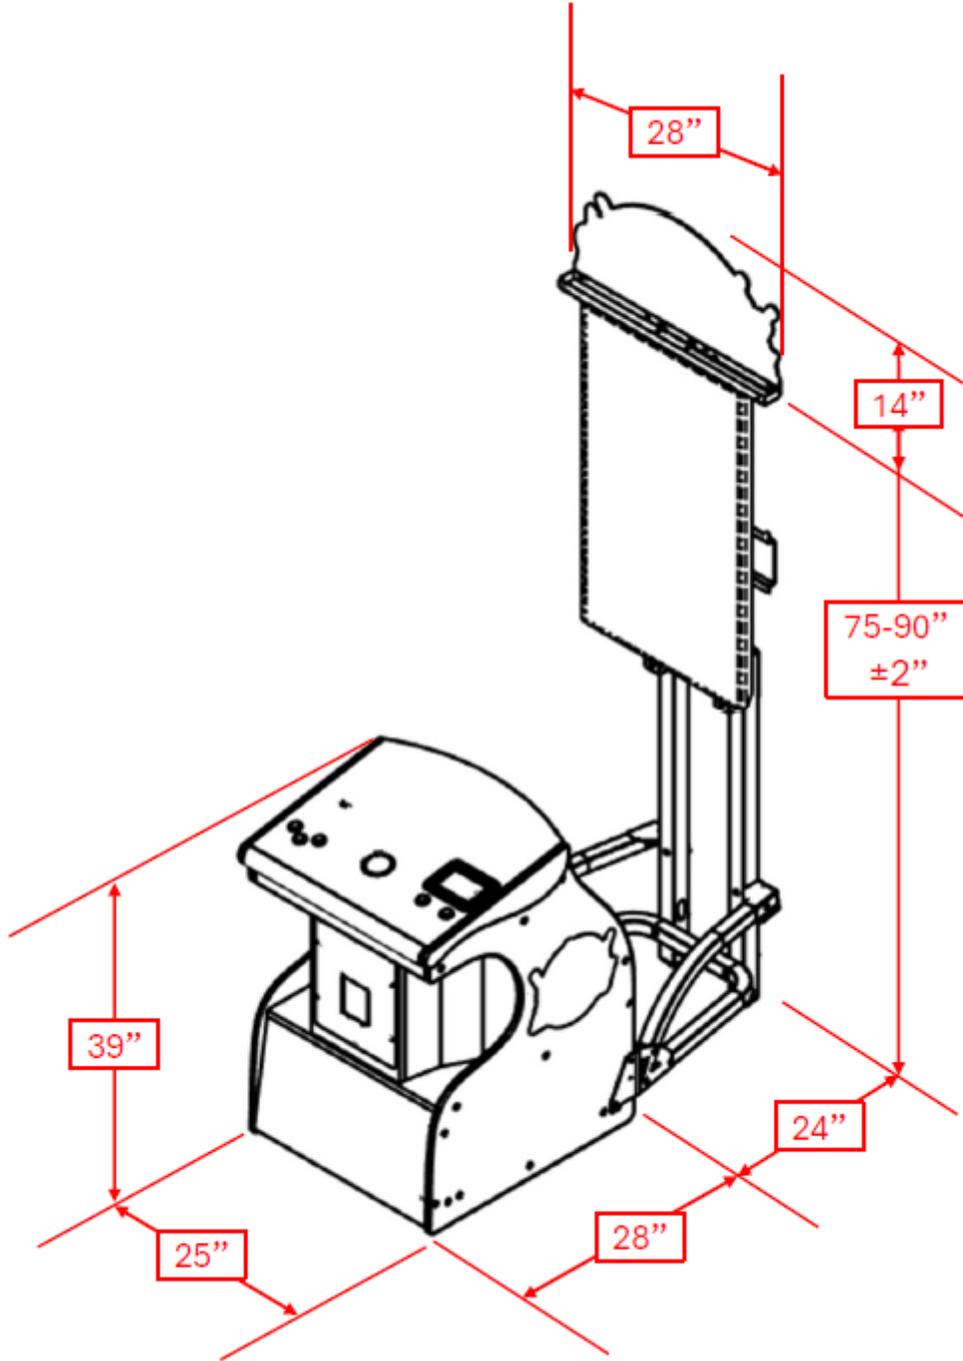



Showpiece Pro Stand - Install Guide

Marquee Assembly



The lighted marquee adds an impressive display and high visibility to your game.

Assemble the marquee before attaching it to the 4K TV.

If attaching to a wall mount, leave enough space between the mounted TV and the wall to work comfortably while attaching the marquee and USB cable.

Hardware Parts List

Item Number	Part Number	Item Description	Total Item Quantity
1	845392310	Marquee	1
2	752392312	Marquee Art Holder	1
3	752392313	Marquee Back Support	1
4	915392302	LED Light Strip – USB-A Cable	1
5	785000086	Flange Nut, 8-32	6
6	NA	Hook & loop Adhesive Strips, 1/2" wide, 24" long	1
7	NA	Hook & loop Adhesive Strips, 2" wide, 4" long	1
8	795000090	Wire Tie Wrap	3




Tools: You will need a 11/32" deep socket and nut driver or a small wrench for the nuts.




Showpiece Pro Stand - Install Guide

Attach Marquee Back Support

Use (2) Flange Nuts to loosely attach the Marquee Back Support to the underside of the Marquee Art Holder. The Marquee Back Support is adjustable to the width of the monitor. **Do not tighten yet.**

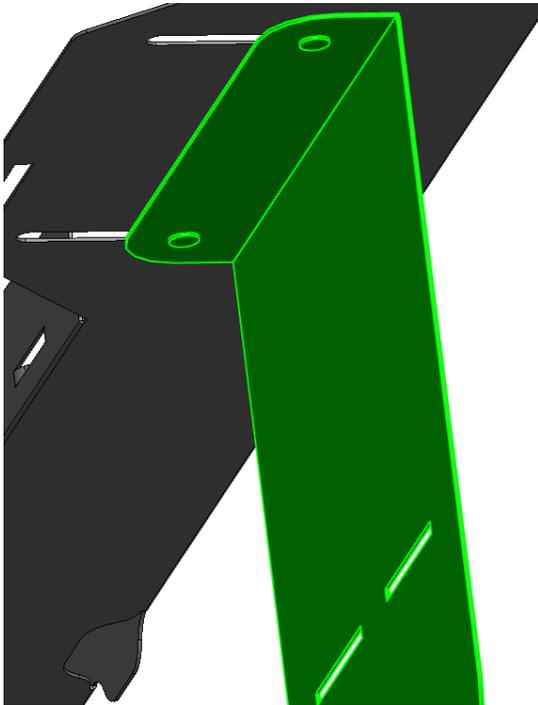


View from Below

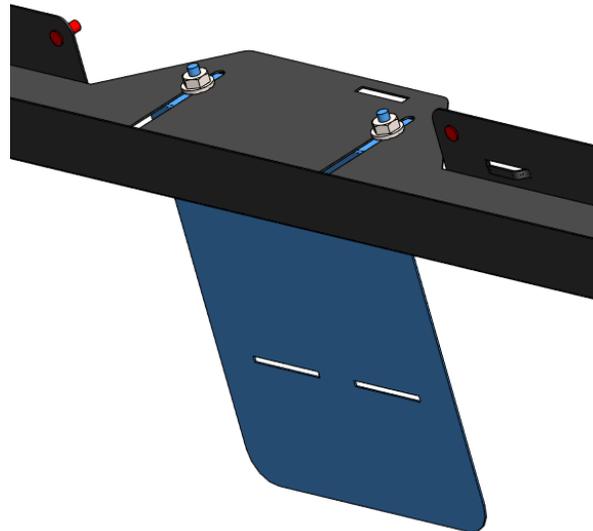

View from Above

Attach Marquee

Use (4) Flange Nuts to loosely attach the Marquee to the rear of the Marquee Art Holder. Tighten with a 11/32" deep socket and nut driver.

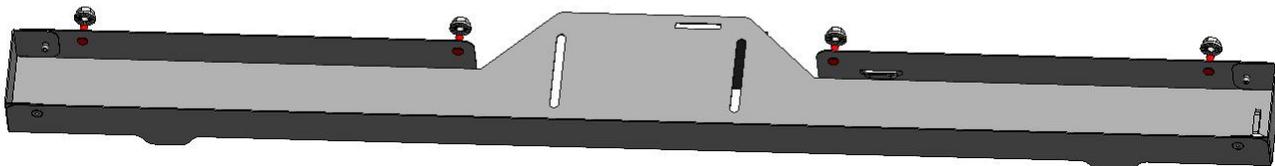




Showpiece Pro Stand - Install Guide

Attach LED Light Strip and Tie Wrap 1


Remove the adhesive backing on the underside of the LED Light Strip. Carefully place the LED Light Strip at the front of the Marquee Art Holder as shown in the overhead view below, adhering the underside to the metal.

Guide the cable around the inside of the Marquee Art Holder and out the rear mouse hole on the Marquee.

Attach Tie Wrap 1 around the cable and through the raised tie holder at the side of the Marquee Art Holder.

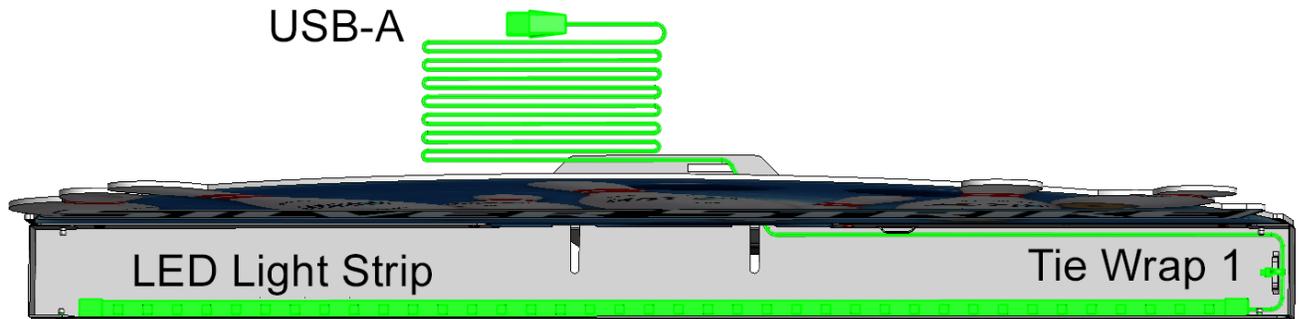

Tie Wrap 1

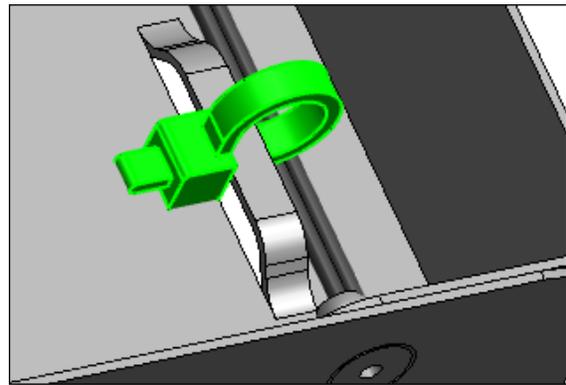





Showpiece Pro Stand - Install Guide

Attach Wrap 2 & 3

Attach Tie Wrap 2 through the raised clip holder and cable as shown in the overhead view below.

Attach Tie Wrap 3 at the rear of the Marquee Back Support, holding the LED Light Strip Cable in place at the slotted opening.

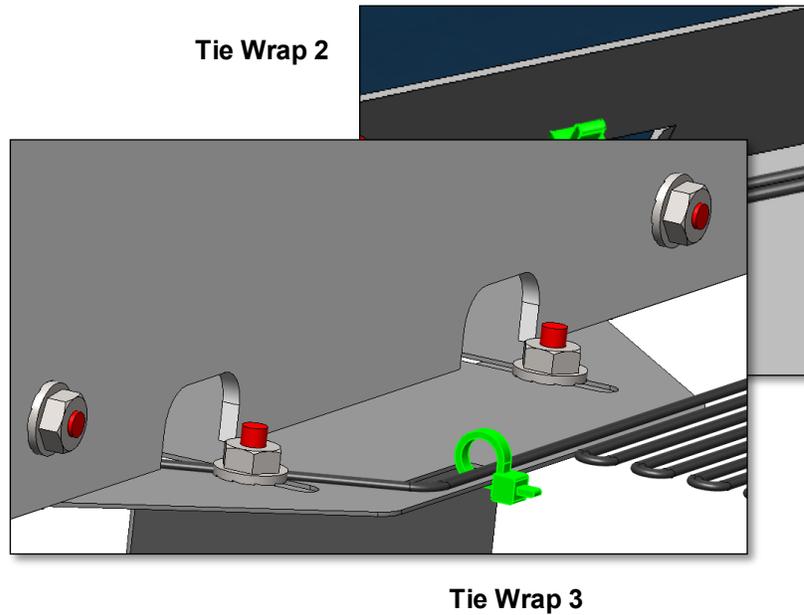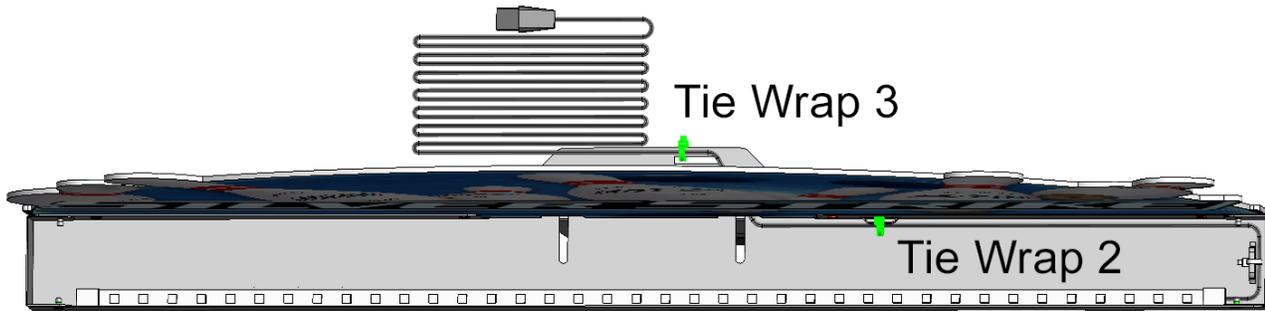



Showpiece Pro Stand - Install Guide

Attach Adhesive Strips

Attach Adhesive Strips to the underside of the Marquee Art Holder and Marquee Back Support as shown below.





Showpiece Pro Stand - Install Guide

Attach Marquee to 4K TV

Slide the Marquee Back Support over the edge of the 4K TV. Adjust for the width of the TV so it is snug and tighten the Flange Nuts with an 11/32" deep socket and nut driver. Plug the USB-A Cable to the rear of the TV. The light will automatically power ON.

